


Visqueen membrane as specified. On-site heat weldable membranes include the following:

- Visqueen High Performance Damp Proof Membrane
- Visqueen Radon R400 Membrane
- Visqueen Ultimate RadonBlok 400
- Visqueen Ultimate RadonBlok 600
- Visqueen Low Permeability Gas Membrane
- Visqueen Gas Barrier
- Visqueen Ultimate HC Blok
- Visqueen High Performance Urban Drainage Geomembrane

2 Visqueen TreadGUARD protection where specified

3 Smooth substrate e.g. sand blinding

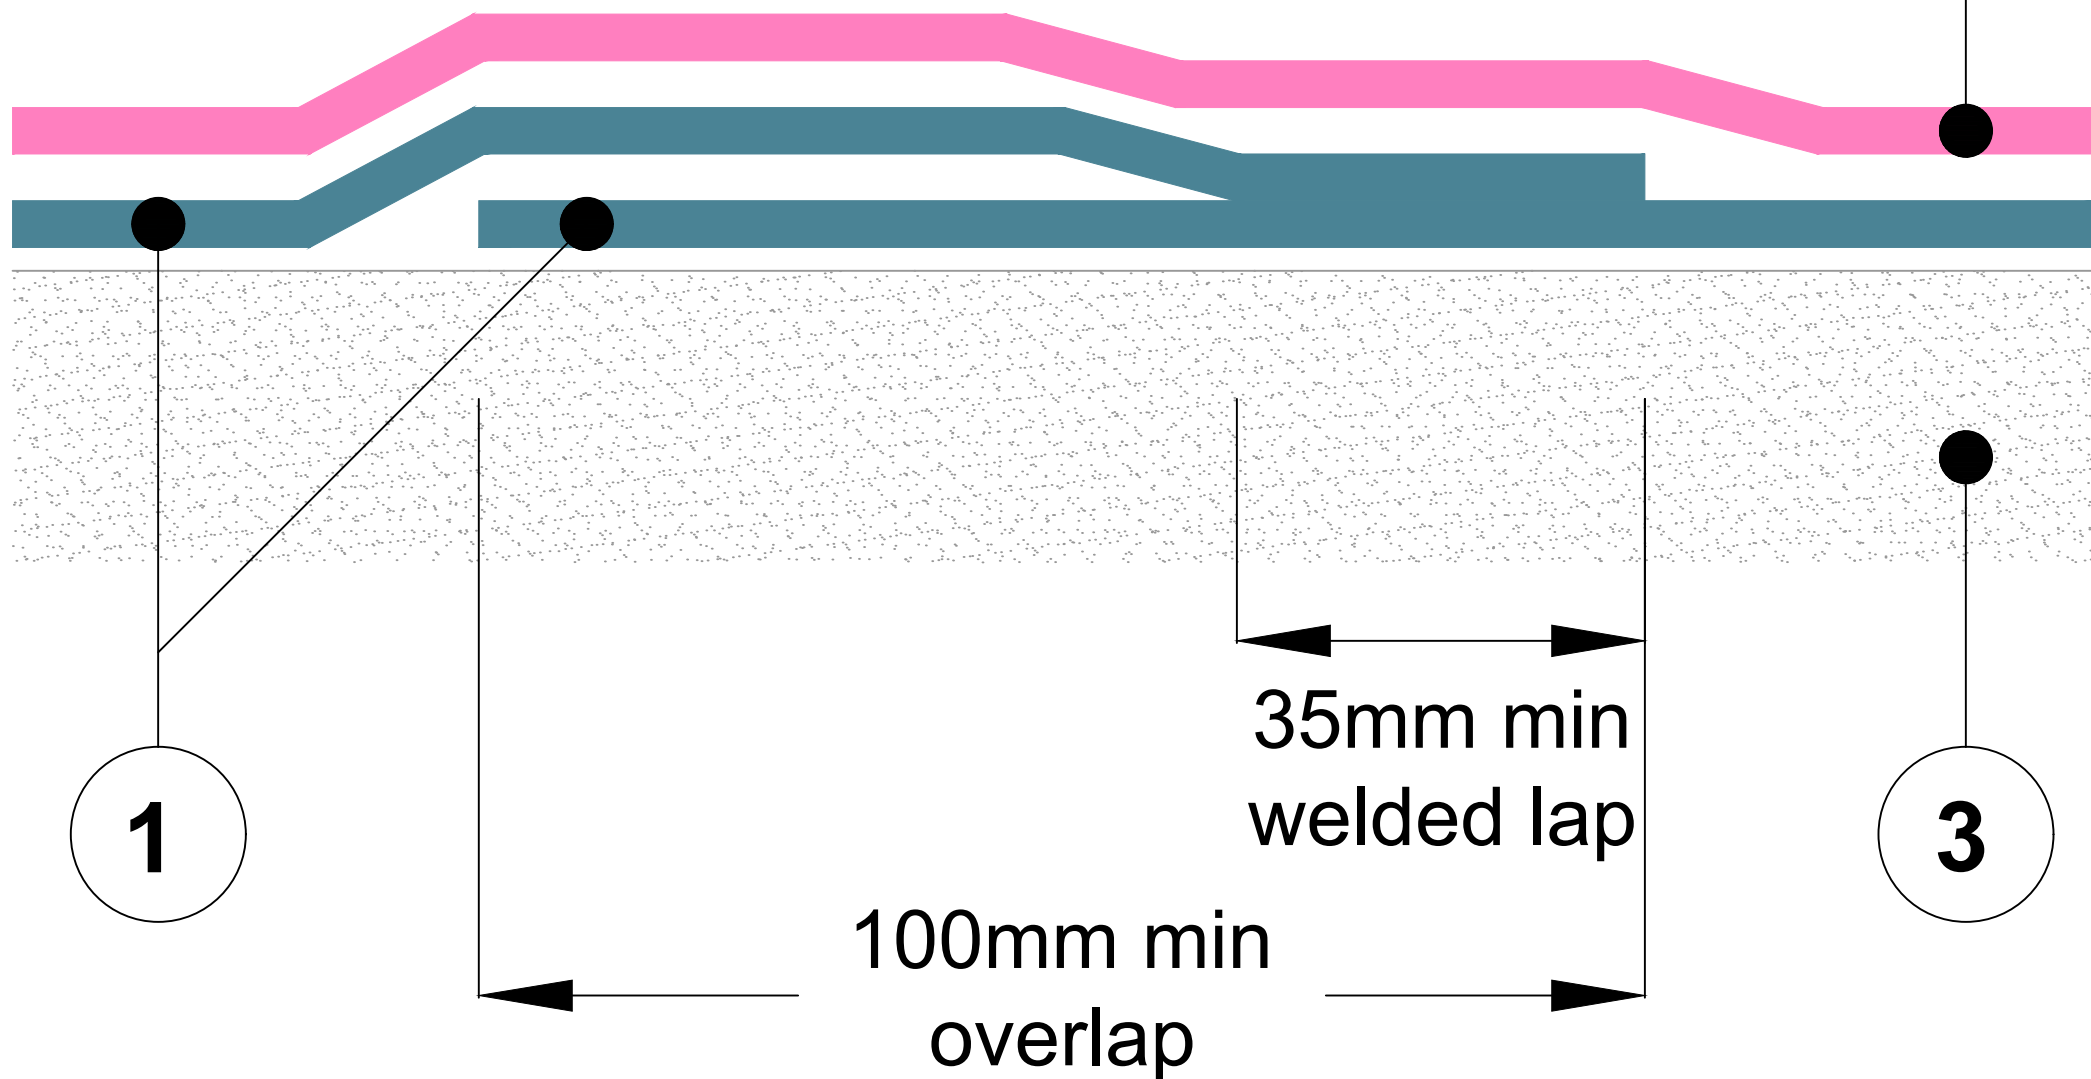

**CRITICAL GUIDANCE NOTES**

Visqueen Guidance Details are for illustration purposes only. It is the lead designer's responsibility to ensure Guidance Details are incorporated correctly into construction drawings.

Visqueen take no project design liability, or responsibility for the use of Guidance Details. Visqueen have no control over the situation in which the products are installed. Visqueen provide a Contract Design Service where project specific drawings can be produced. Contact Visqueen Technical Services for further information.

Site construction sequencing should be assessed before the appropriate Guidance Detail is selected and approved by the lead designer.

All Visqueen materials must be installed in strict accordance with the Visqueen Product Datasheets and applicable third party certificates.

This detail relates to the formation of a sealed lap joint using a hot air hand welder and roller. Other lap joint heat welding techniques are suitable including wedge welding.

Drawing not to scale, use figured dimensions only. All figured dimensions are in millimetres.

**Guidance Detail**

Date: September 2023

Drawing No: JD-08

Revision: A | Drawn by: JR

Approved by: SD


 Tel: 0333 202 6800  
 enquiries@visqueen.com  
 www.visqueen.com

© Copyright reserved. This drawing may not be reproduced or amended without prior written permission.



**HAND WELDED LAP JOINT DETAIL**